


PORTABLE INSTRUMENT QUALITY AIR.  
THE SULLAIR AF SYSTEM.

300 TO 1600 CFM







 **SULLAIR**

**1600**

100 PSI 100 CFM  
75 PSI 125 CFM



# The Sullair AF SYSTEM

Clean, instrument  
quality air—wherever  
you need it.

**AN INNOVATIVE SYSTEM**—In today's industrial and construction work-places, there is an increasing need for extremely clean, high quality compressed air that can be produced on-site. To meet this need, Sullair has developed the AF System. This innovative portable compressed air system delivers instrument quality air, conveniently and cost effectively, wherever it is needed.

**INSTRUMENT QUALITY AIR**—The Sullair AF System includes portable rotary screw compressors from 300 cfm up to 1600 cfm and rated pressures from 100 psig up to 200 psig. This system delivers aftercooled and filtered compressed air that meets or exceeds ISO 8573-1: Class 1.7.1 quality standards. (See chart on following page.) Sullair has offered the AF System since 1995.

**WIDE-RANGING APPLICATIONS**—The AF System's high quality air is ideal for instrumentation, process equipment and other sophisticated industrial applications. A mobile unit, the AF System is a convenient source of supplemental, replacement and emergency plant air. On construction sites, this system provides clean, instrument quality air for media blasting and painting/protective coating applications.

A completely  
portable system.

**SYSTEM COMPONENTS**—The AF System consists of a specially designed Sullair portable compressor with a built-in high-capacity, low-approach aftercooler, a water/condensate trap and a highly efficient contaminant-removal system.

The contaminant-removal system includes primary and secondary filters with condensate traps. The primary filter is a coalescing type filter which captures and removes particles down to 1.0 micron and larger in diameter, and maximum remaining aerosol content at 0.5 PPM. The secondary filter is a high efficiency coalescing type which removes particulate to 0.01 micron and larger in diameter, and maximum aerosol content of 0.01 PPM.

**DUAL FUNCTION SYSTEM**—The Sullair AF portable compressor has two service valves: one for standard air and one for instrument quality air. This dual valve system eliminates the need for a second compressor that might be required for standard-air-only applications.

**AUTOMATIC DRAIN VALVE**—The AF System's large capacity water/condensate trap features an automatic drain valve that continuously releases water while the machine is operating.


**ENCLOSED FOR PROTECTION**—All system components are located within the enclosure for weather and damage protection.



# Why air filtration is essential.

**ATMOSPHERIC CONTAMINATION**—Under normal circumstances, the atmosphere contains dirt, water and hydrocarbon vapor from unburnt fuels and industrial processes.

One cubic foot of air contains approximately 4 million particles—80% of them 2 microns or less in size. Since a compressor uses outside air, it constantly draws in atmospheric contaminants as well.

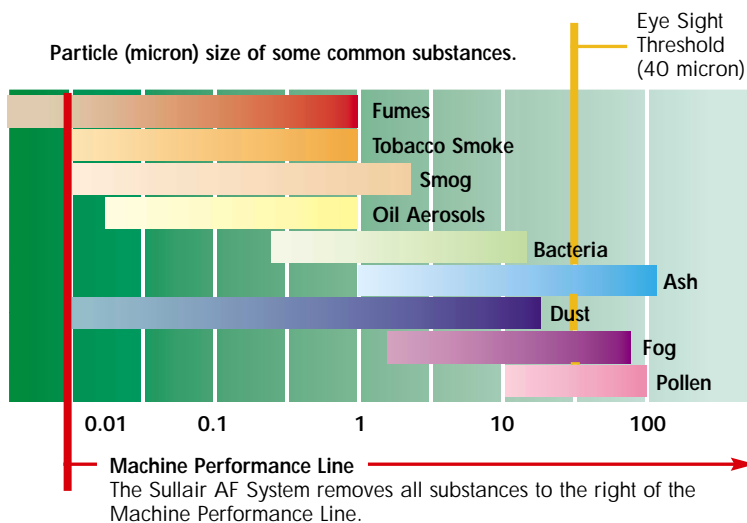


## MICRONS

### ARE MINUTE—


A micron is one millionth of a meter, or 1/1000 millimeter. A 1.0 micron particle is invisible without magnification. (A 40-micron particle is the smallest size

visible to the human eye.) Because micron particles are so small, air filtration is essential.

If .01 micron is this big...



then .1 micron is this big...




and this arc is just part of a full 1.0 micron.



When you realize it takes 10 million particles 1.0 micron in diameter to cover this 1/8 inch dot ● you can appreciate submicron particulate removal.

	ISO 8573-1: 1.7.1		
	Particle Size Class 1	Dew Point Class 7	Oil Content Class 1
Standard— Maximum Particle Size and Maximum Concentration	0.1 Micron	No Requirement	0.01 mg/cu m
Sullair AF Contaminant Removal Performance	0.01 Micron	No Requirement	0.009 mg/cu m



**CLEAN AIR, VIRTUALLY FREE OF OIL AEROSOLS**—With a Sullair AF System, the air that reaches the equipment, application or process is virtually free of oil aerosols, particulates and other contaminants 0.01 and larger. (However, the system is not intended to remove carbon monoxide, methyl isocyanate or any other noxious, corrosive, toxic gases, vapors or fumes that may be in the atmosphere at the machine site.)

**COMPLETELY FREE OF CONDENSATE**—The Sullair AF System delivers cool, compressed air that is free of condensate. In the AF portable enclosure, the compressed air leaving the aftercooler is reheated 5° to 7° F before it leaves the machine, thus providing some buffer from the dew point. If a dewpoint is required, a separate dryer may be required.

Portable  
convenience  
and instrument  
quality air.

The Sullair  
AF System  
offers both.

**SULLAIR SYSTEM GOES ANYWHERE**—From manufacturing plants to construction sites, the Sullair AF System provides “instant” instrument quality air in any work setting.

**OPERATES EFFICIENTLY**—The Sullair AF System uses no air to operate the aftercooler or filter system. Therefore none of the system’s air is consumed or lost.

**RUNS QUIETLY**—The Sullair AF System meets EPA noise regulations of 76 dBA @ 7M.

**EASY STARTUP**—No special set-up or preparation is necessary at the work site. Normal start/run procedure is all that is required to obtain instrument quality air.



# Package design features



## The Sullair AF compressor.

**DEPENDABLE ROTARY SCREW COMPRESSOR**—Single-stage, fluid flooded, with cast iron housing.

**AMPLE PADLOCKABLE SERVICE DOORS**—Front, side and rear doors provide easy access.

**0 TO 100% CAPACITY CONTROL**—Automatic inlet valve and unloaded starting.


**TWO-STAGE DRY TYPE AIR FILTERS WITH SAFETY ELEMENT**—Positioned to draw cool outside air.

**INSTRUMENT PANEL**—Equipped with top quality gauges, circuit breaker, idle warm-up valve and diagnostic shutdown indicator system.

**DIAGNOSTIC SHUTDOWN INDICATOR SYSTEM**—Lights indicate cause of shutdown; simplify troubleshooting.

**PROTECTIVE SHUTDOWN SWITCHES**—Differential pressure, low engine oil pressure, high engine water temperature, low water level, high compressor temperature or low fuel level.

**AWF COMPRESSOR FLUID**—Provides faster, easier cold weather startups. Tolerates and separates water easily. Reduced fluid carryover extends filter life.



Easy-to-operate valves allow the compressor to be used for both instrument quality air (A) and standard air (B).

### **A—Instrument Quality Air**

Particles <0.01 micron  
Oil content <0.01 micron

### **B—Standard Air**

Not aftercooled or filtered



# Aftercooler and filters

## DIFFERENTIAL PRESSURE SHUTDOWN SYSTEM FOR FILTERS

This system senses buildup in the filters and sounds an alarm when filters require maintenance. If there is no response to the alarm, the system activates a warning light and automatically shuts down the machine, to ensure that no contaminant or oil is allowed to go beyond the filter. (Option on 300HH, 375, 375H and 425)



Primary and secondary filters with condensate trap remove particles and aerosols.





## LOW-APPROACH AFTERCOOLER WITH CONDENSATE TRAP

This feature is incorporated into the portable cooling system. The discharge air temperature is compatible with inlet air temperature requirements of your downstream dryer.

## AN ENVIRONMENTALLY-FRIENDLY SOLUTION FOR CONDENSATE REMOVAL

Sullair's standard condensate collection/disposal system, which consists of hoses from water and filter traps routed through the belly-pan of the machine, captures the condensate and allows you to dispose of it safely.

An alternate method allows the condensate to be deposited on the ground.

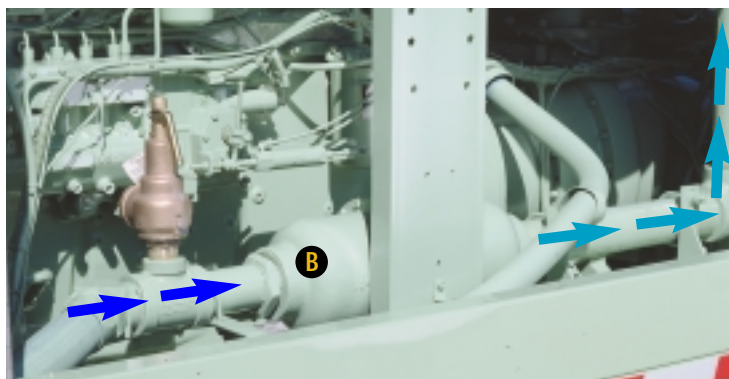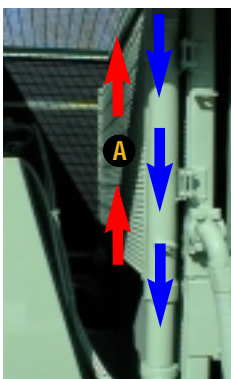

LEFT— → Hot air enters air-to-air aftercooler (A). → Aftercooled air and condensate.

MIDDLE— → Cool air and condensate. Water trap (B) removes condensate. → Cool and dry air (to filters).

RIGHT—Optional "Cold Weather/Shutter" package, which lowers the low temperature capability to -20°F, can be installed to operate the AF System at 35°F and below. In sub-freezing ambient conditions, the thermostatically-controlled louvers open and close automatically to maintain above-freezing air temperature within the enclosure, thereby preventing ice from forming in the aftercooler/condensate-removal system. (Not available on 375, 375H and 425)

# Specifications, Weights and Dimensions

THE SULLAIR 600H AF, 750 AF, 750H AF, 825 AF, 900 AF, 1300H AF AND 1600H AF PORTABLE AIR COMPRESSORS WITH AFTERCOOLER, WATER/CONDENSATE TRAPS AND FILTERS

Model		600H AF	750 AF	750H AF	825 AF	900 AF	1300H AF	1600H AF
Delivery@ Rated Pressure		<b>600 cfm</b> 283 L/S 17.0 m³/min	<b>750 cfm</b> 354 L/S 21.2 m³/min	<b>750 cfm</b> 354 L/S 21.2 m³/min	<b>825 cfm</b> 389 L/S 23.4 m³/min	<b>900 cfm</b> 425 L/S 25 m³/min	<b>1300 cfm</b> 614 L/S 36.8 m³/min	<b>1600 cfm</b> 755 L/S 45.3 m³/min
Rated Pressure	psig (bar)	<b>150 (10)</b>	<b>125 (8.5)</b>	<b>150 (10)</b>	<b>125 (8.5)</b>	<b>100 (7)</b>	<b>150 (10)</b>	<b>150 (10)</b>
Pressure Range	psig (bar)	<b>80-150 (5.5-10)</b>	<b>80-125 (5.5-8.5)</b>	<b>80-150 (5.5-10)</b>	<b>80-125 (5.5-8.5)</b>	<b>80-125 (5.5-8.5)</b>	<b>80-150 (5.5-10)</b>	<b>80-150 (5.5-10)</b>
Designated Model								
Tandem/Tri-Axle Mount								
Weight (wet*)	lbs (kg)	<b>10350 (4695)</b>	<b>10350 (4695)</b>	<b>10600 (4808)</b>	<b>10600 (4808)</b>	<b>10600 (4808)</b>	<b>16620 (7539)</b>	<b>17320 (7856)</b>
Length (drawbar)	in (mm)	<b>191 (4851)</b>	<b>191 (4851)</b>	<b>191 (4851)</b>	<b>191 (4851)</b>	<b>191 (4851)</b>	<b>238 (6045)</b>	<b>238 (6045)</b>
Length (canopy)	in (mm)	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>179 (4547)</b>	<b>179 (4547)</b>
Width	in (mm)	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>88 (2235)</b>	<b>88 (2235)</b>
Height** (canopy)	in (mm)	<b>83 (2108)</b>	<b>83 (2108)</b>	<b>83 (2108)</b>	<b>83 (2108)</b>	<b>83 (2108)</b>	<b>92 (2337)</b>	<b>92 (2337)</b>
Track Width	in (mm)	<b>77 (1956)</b>	<b>77 (1956)</b>	<b>77 (1956)</b>	<b>77 (1956)</b>	<b>77 (1956)</b>	<b>77 (1956)</b>	<b>77 (1956)</b>
Tire Size		<b>9.50 x 16.5 LT (E)</b>	<b>9.50 x 16.5 LT (E)</b>	<b>9.50 x 16.5 LT (E)</b>	<b>9.50 x 16.5 LT (E)</b>	<b>9.50 x 16.5 LT (E)</b>	<b>9.50 x 16.5 LT (E)</b>	<b>9.50 x 16.5 LT (E)</b>
4-Wheel Mount								
Weight (wet*)	lbs (kg)	<b>10500 (4953)</b>	<b>10500 (4763)</b>	<b>10320 (4681)</b>	<b>10750 (4876)</b>	<b>10750 (4876)</b>	<b>16290 (7389)</b>	<b>16870 (7652)</b>
Length (drawbar)	in (mm)	<b>204 (5182)</b>	<b>204 (5182)</b>	<b>204 (5182)</b>	<b>204 (5182)</b>	<b>204 (5182)</b>	<b>244 (6198)</b>	<b>244 (6198)</b>
Length (canopy)	in (mm)	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>179 (4547)</b>	<b>179 (4547)</b>
Width	in (mm)	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>88 (2235)</b>	<b>88 (2235)</b>
Height** (canopy)	in (mm)	<b>89 (2261)</b>	<b>89 (2261)</b>	<b>89 (2261)</b>	<b>89 (2261)</b>	<b>89 (2261)</b>	<b>99 (2515)</b>	<b>99 (2515)</b>
Track Width	in (mm)	<b>79.5 (2019)</b>	<b>79.5 (2019)</b>	<b>79.5 (2019)</b>	<b>79.5 (2019)</b>	<b>79.5 (2019)</b>	<b>78 (1981)</b>	<b>78 (1981)</b>
Tire Size		<b>8.75 x 16.5 (D)</b>	<b>8.75 x 16.5 (D)</b>	<b>8.75 x 16.5 (D)</b>	<b>8.75 x 16.5 (D)</b>	<b>8.75 x 16.5 (D)</b>	<b>8.25 x 15 TR (F)</b>	<b>8.25 x 15 TR (F)</b>
Less Running gear								
Weight (wet*)	lbs (kg)	<b>9375 (4253)</b>	<b>9375 (4253)</b>	<b>9625 (4366)</b>	<b>9625 (4366)</b>	<b>9625 (4366)</b>	<b>15640 (7094)</b>	<b>16220 (7357)</b>
Length (canopy)	in (mm)	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>131 (3327)</b>	<b>179 (4547)</b>	<b>179 (4547)</b>
Width	in (mm)	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>87 (2210)</b>	<b>88 (2235)</b>	<b>88 (2235)</b>
Height** (canopy)	in (mm)	<b>72 (1829)</b>	<b>72 (1829)</b>	<b>72 (1829)</b>	<b>72 (1829)</b>	<b>72 (1829)</b>	<b>83 (2108)</b>	<b>83 (2108)</b>
Engine Make		<b>Caterpillar</b>	<b>Caterpillar</b>	<b>Caterpillar</b>	<b>Caterpillar</b>	<b>Caterpillar</b>	<b>Caterpillar</b>	<b>Caterpillar</b>
Engine Type		<b>Diesel</b>	<b>Diesel</b>	<b>Diesel</b>	<b>Diesel</b>	<b>Diesel</b>	<b>Diesel</b>	<b>Diesel</b>
Engine Model		<b>C-9 ATAAC</b>	<b>C-9 ATAAC</b>	<b>C-9 ATAAC</b>	<b>C-9 ATAAC</b>	<b>C-9 ATAAC</b>	<b>C-15 ATAAC</b>	<b>C-15 ATAAC</b>
Displacement	cu in (L)	<b>538 (8.8)</b>	<b>538 (8.8)</b>	<b>538 (8.8)</b>	<b>538 (8.8)</b>	<b>538 (8.8)</b>	<b>893 (14.6)</b>	<b>893 (14.6)</b>
Cylinders		<b>6</b>	<b>6</b>	<b>6</b>	<b>6</b>	<b>6</b>	<b>6</b>	<b>6</b>
Cycles		<b>4</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>4</b>
Bore and Stroke	in (mm)	<b>4.41 x 5.87 (112 x 149)</b>	<b>4.41 x 5.87 (112 x 149)</b>	<b>4.41 x 5.87 (112 x 149)</b>	<b>4.41 x 5.87 (112 x 149)</b>	<b>4.41 x 5.87 (112 x 149)</b>	<b>5.40 x 6.50 (137 x 165)</b>	<b>5.40 x 6.50 (137 x 165)</b>
Rated Speed	rpm	<b>1800</b>	<b>1800</b>	<b>1800</b>	<b>1800</b>	<b>1800</b>	<b>1800</b>	<b>1800</b>
Rated Power	hp (kW)	<b>275 (205)</b>	<b>275 (205)</b>	<b>275 (205)</b>	<b>275 (205)</b>	<b>275 (205)</b>	<b>450 (336)</b>	<b>525 (391)</b>

\* Weights include aftercooler, traps and filter.

\*\* Add 8 inches for exhaust.




# Specifications, Weights and Dimensions

THE SULLAIR 300HH AF, 375 AF, 375H AF AND 425 AF PORTABLE AIR COMPRESSORS WITH AFTER-COOLER, WATER/CONDENSATE TRAPS AND FILTERS



Model		300HH AF	300HH AF	375 AF	375 AF	375H AF	375H AF	425 AF	425 AF
Delivery@ Rated Pressure		300 cfm	300 cfm	375 cfm	375 cfm	375 cfm	375 cfm	425 cfm	425 cfm
		142 L/S	177 L/S	177 L/S	177 L/S	177 L/S	177 L/S	200 L/S	200 L/S
		8.5 m <sup>3</sup> /min	10.6 m <sup>3</sup> /min	10.6 m <sup>3</sup> /min	10.6 m <sup>3</sup> /min	10.6 m <sup>3</sup> /min	10.6 m <sup>3</sup> /min	12.0 m <sup>3</sup> /min	12.0 m <sup>3</sup> /min
Rated Pressure	psig (bar)	200 (14)	200 (14)	100 (7)	100 (7)	150 (10)	150 (10)	100 (7)	100 (7)
Pressure Range	psig (bar)	80-200 (5.5-14)	80-200 (5.5-14)	80-125 (5.5-8.5)	80-125 (5.5-8.5)	80-150 (5.5-10)	80-150 (5.5-10)	80-125 (5.5-8.5)	80-125 (5.5-8.5)
Designated Model									
Two-wheel Mount									
Weight (wet*)	lbs (kg)	4220 (1914)	4250 (1928)	4220 (1914)	4310 (1955)	4220 (1914)	4250 (1928)	4220 (1914)	4250 (1928)
Length (drawbar)	in (mm)	151 (3835)	151 (3835)	151 (3835)	151 (3835)	151 (3835)	151 (3835)	151 (3835)	151 (3835)
Length (canopy)	in (mm)	95.7 (2431)	95.7 (2431)	95.7 (2431)	95.7 (2431)	95.7 (2431)	95.7 (2431)	95.7 (2431)	95.7 (2431)
Width	in (mm)	78.9 (2004)	78.9 (2004)	78.9 (2004)	78.9 (2004)	78.9 (2004)	78.9 (2004)	78.9 (2004)	78.9 (2004)
Height** (canopy)	in (mm)	68.5 (1740)	68.5 (1740)	68.5 (1740)	68.5 (1740)	68.5 (1740)	68.5 (1740)	68.5 (1740)	68.5 (1740)
Track Width	in (mm)	67.5 (1715)	67.5 (1715)	67.5 (1715)	67.5 (1715)	67.5 (1715)	67.5 (1715)	67.5 (1715)	67.5 (1715)
Tire Size		H78 x15ST (D)	H78 x15ST (D)	H78 x15ST (D)	H78 x15ST (D)	H78 x15ST (D)	H78 x15ST (D)	H78 x15ST (D)	H78 x15ST (D)
Engine Make		John Deere	Caterpillar	John Deere	Caterpillar	John Deere	Caterpillar	John Deere	Caterpillar
Engine Type		Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Engine Model		4045HF	3054C	4045TF	3054C	4045HF	3054C	4045HF	3054C
Displacement	cu in (L)	276 (4.5)	269 (4.41)	276 (4.5)	269 (4.41)	276 (4.5)	269 (4.41)	276 (4.5)	269 (4.41)
Cylinders		4	4	4	4	4	4	4	4
Cycles		4	4	4	4	4	4	4	4
Bore and Stroke	in (mm)	4.19 x 5.00 (106 x 127)	4.13 x 5.00 (105 x 127)	4.19 x 5.00 (106 x 127)	4.13 x 5.00 (105 x 127)	4.19 x 5.00 (106 x 127)	4.13 x 5.00 (105 x 127)	4.19 x 5.00 (106 x 127)	4.13 x 5.00 (105 x 127)
Rated Speed	rpm	2250	2200	2250	2200	2250	2200	2300	2200
Rated Power	hp (kW)	125 (93)	130 (97)	115 (86)	108 (80)	125 (93)	130 (97)	125 (93)	130 (97)

\* Weights include aftercooler, traps and filter.

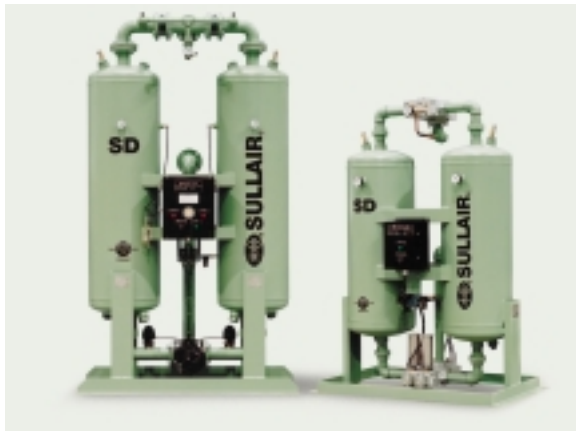

#### SD Regenerative Dryers

- Traditional twin tower desiccant regenerative adsorption dryer mounted on oil field skid.
- Pre- and after-filters are mounted and piped
- Instrument quality air that meets or exceeds ISO 8573.1
- Six models available with capacities ranging from 600 to 1710 SCFM
- -40°F pressure dewpoint means moisture-free air, even when air lines are outside in sub-freezing temperatures
- Proven valve design offers trouble free operation
- Towers are ASME code stamped and CRN approved



#### AWF and the 5-Year Air End Warranty

The Sullair portable compressor air end is warranted for 5-years or 10,000 hours, whichever comes first, when Sullair AWF fluid and genuine Sullair filters are used.

Portables compressors are usually operated and stored outside, often in extreme weather. Conventional rotary screw compressor fluids become thicker as temperatures drop. This causes a viscous drag on the rotors at startup, making it difficult for engines to generate enough power. In high temperatures and humid climates, conventional compressor fluids tend to lose viscosity and water tolerance, reducing service life.

To answer these problems, Sullair developed AWF, the All Weather Fluid. AWF allows easier cold weather starting and warmup, while providing exceptional lubrication during hot or severe service.



#### Sullair Parts and Aftermarket Support

Because Sullair believes that using Genuine Sullair Replacement Parts is critical for optimum compressor performance, we make them available on a global basis. Through our computer-based system, our distributors can procure Genuine Sullair Replacement Parts for any piece of Sullair equipment in any part of the world, quickly and efficiently.



#### ISO Certification

Sullair Corporation is one of the world's leading authorities on rotary screw compression technology. Since it began manufacturing rotary screw compressors in 1965, Sullair has focused on this area of specialization. Sullair uses its extensive resources in Michigan City, Indiana to further develop and advance compressed air technology.

Sullair products are manufactured to the highest quality standards in an ISO 9001 certified quality system.



[www.sullair.com](http://www.sullair.com)

**SULLAIR CORPORATION**, 3700 E. Michigan Blvd., Michigan City, IN 46360 Telephone: 1-800-SULLAIR or 1-219-879-5451 Fax: 1-219-874-1504

**SULLAIR EUROPE S.A.**, Zone des Granges, BP 82, 42602 Montbrison, Cedex, France, Telephone: (33) 4.77.96.84.70 Fax: (33) 4.77.96.84.99

**SULLAIR ASIA LTD.**, 74 Joo Koon Circle, Jurong, Singapore 629093, Telephone: (65) 861-1211 Fax: (65) 861-2967 Telex RS25117

**SHENZHEN SULLAIR ASIA INTERNATIONAL CO., LTD.**, Zuo Pao Tai Road, Chiwan, Shekou, Shenzhen 518068, China, Tel: (86) 755-6851686 Fax: (86) 755-6853473

**SULLAIR TAIWAN LTD.**, 2nd Fl. No. 96, Chien Kuo N. Road, Taipei 104, Taiwan, Telephone: 886-2-505-7256, Fax: 886-2-505-5480

**SULLAIR ARGENTINA**, Goncalves Dias 1145, 1276 Buenos Aires, Argentina, Telephone: 541-303-0621, Fax: 541-303-0626